



PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
30V	5m Ω	69A



G. GATE
D. DRAIN
S. SOURCE

100% UIS Tested
100% Rg Tested

Features

- Pb-Free, Halogen Free and RoHS compliant.
- Low $R_{DS(on)}$ to Minimize Conduction Losses.
- Ohmic Region Good $R_{DS(on)}$ Ratio.
- Optimized Gate Charge to Minimize Switching Losses.

Applications

- Protection Circuits Applications.
- Computer for DC to DC Converters Applications.

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current ⁴	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	69	A
	$T_C = 100\text{ }^{\circ}\text{C}$		44	
Pulsed Drain Current ¹		I_{DM}	108	
Continuous Drain Current	$T_A = 25\text{ }^{\circ}\text{C}$	I_D	22	
	$T_A = 70\text{ }^{\circ}\text{C}$		18	
Avalanche Current		I_{AS}	48	
Avalanche Energy	$L = 0.01\text{mH}$	E_{AS}	12	mJ
Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	40	W
	$T_C = 100\text{ }^{\circ}\text{C}$		16	
Power Dissipation ³	$T_A = 25\text{ }^{\circ}\text{C}$	P_D	4.2	W
	$T_A = 70\text{ }^{\circ}\text{C}$		2.7	
Operating Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	$^{\circ}\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE		SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient ²	$t \leq 10s$	$R_{\theta JA}$		30	°C / W
Junction-to-Ambient ²	Steady-State	$R_{\theta JA}$		62	
Junction-to-Case	Steady-State	$R_{\theta JC}$		3.1	

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

³The Power dissipation is based on $R_{\theta JA}$ $t \leq 10s$ value.

⁴The maximum current rating is package limited.


ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT	
			MIN	TYP	MAX		
STATIC							
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	30			V	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.3	1.6	2.3		
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	nA	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V$			1	μA	
		$V_{DS} = 30V, V_{GS} = 0V, T_J = 55\text{ }^{\circ}C$			10		
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 4.5V, I_D = 13A$		5.4	7.6	$m\Omega$	
		$V_{GS} = 10V, I_D = 13A$		3.7	5		
Forward Transconductance	g_{fs}	$V_{DS} = 5V, I_D = 13A$		44		S	
DYNAMIC							
Input Capacitance	C_{iss}		$V_{GS} = 0V, V_{DS} = 15V, f = 1MHz$		814		pF
Output Capacitance	C_{oss}				471		
Reverse Transfer Capacitance	C_{rss}				11		
Gate Resistance	R_g		$f = 1MHz$		2		Ω
Total Gate Charge ⁵	Q_g	$V_{GS} = 10V$	$V_{DS} = 15V, V_{GS} = 10V, I_D = 13A$		12		nC
		$V_{GS} = 4.5V$			5.4		
Gate-Source Charge ⁵	Q_{gs}				2.9		
Gate-Drain Charge ⁵	Q_{gd}				1		
Turn-On Delay Time ⁵	$t_{d(on)}$		$V_{DS} = 15V, I_D \cong 13A, V_{GS} = 10V, R_{GEN} = 6\Omega$		6.4		nS
Rise Time ⁵	t_r				50		
Turn-Off Delay Time ⁵	$t_{d(off)}$				18		
Fall Time ⁵	t_f				51		


SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T _J = 25 °C)						
Continuous Current ⁶	I _S				33	A
Forward Voltage	V _{SD}	I _F = 13A, V _{GS} = 0V			1.2	V
Reverse Recovery Time	t _{rr}	I _F = 13A, dI _F /dt = 400A / μS		19		nS
Reverse Recovery Charge	Q _{rr}			27		nC

⁵Independent of operating temperature.
⁶The maximum current rating is package limited.


Output Characteristics

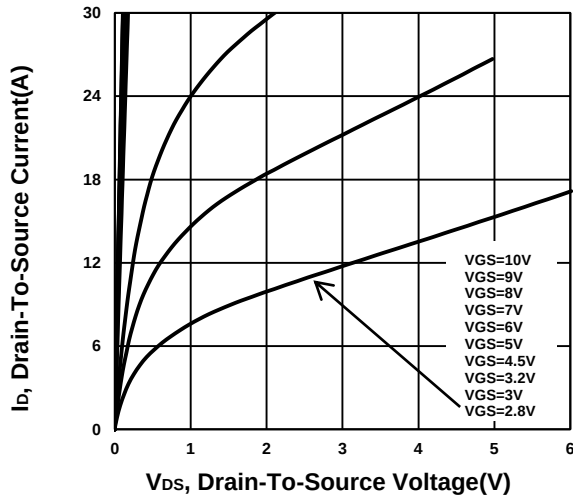


Transfer Characteristics

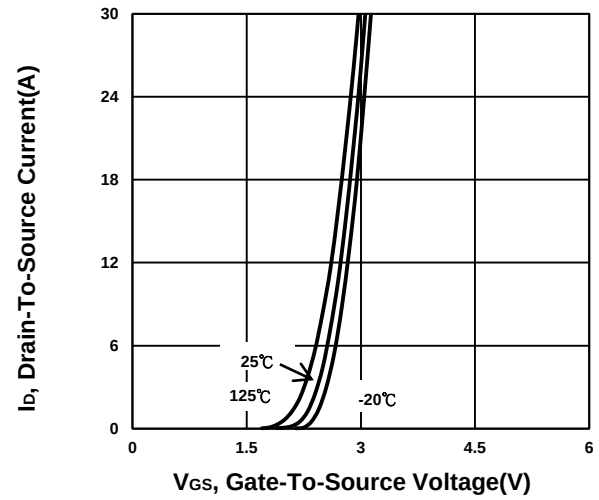


On-Resistance VS Gate-To-Source Voltage

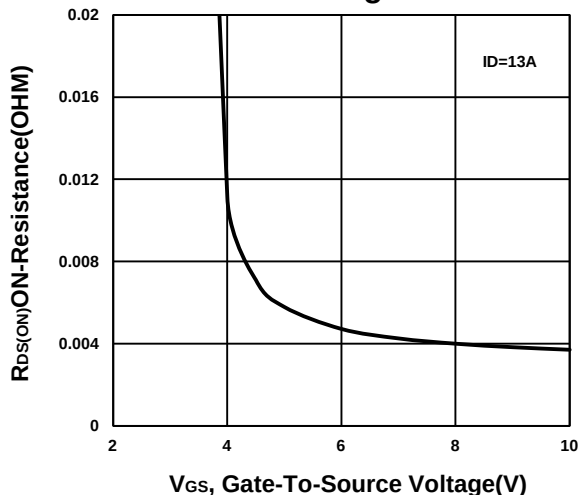


On-Resistance VS Drain Current

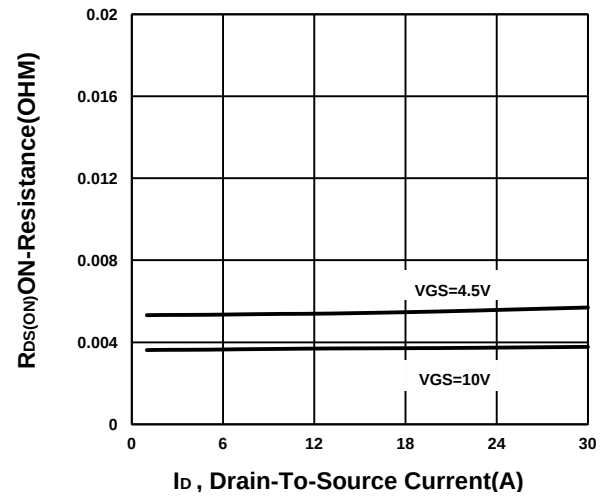


On-Resistance VS Temperature

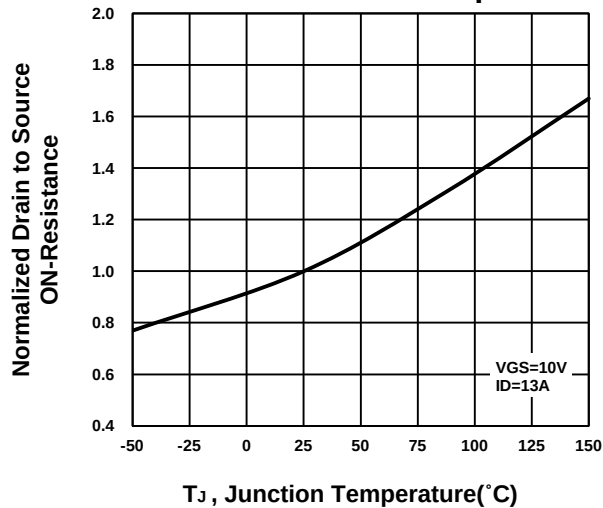


Capacitance Characteristic

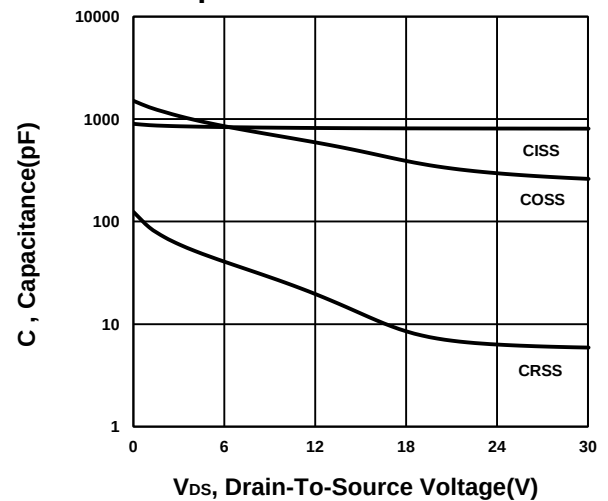


Gate charge Characteristics

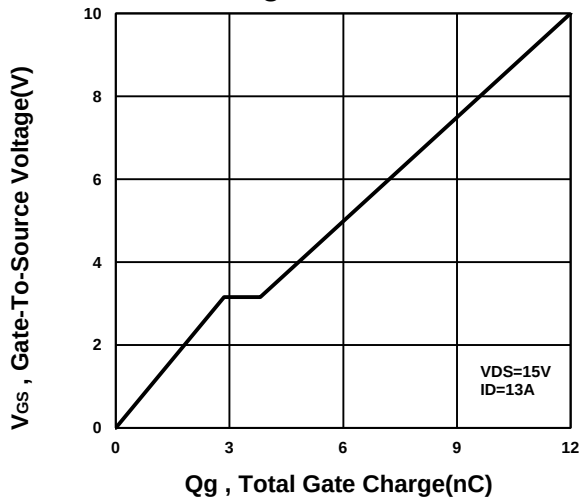


Source-Drain Diode Forward Voltage

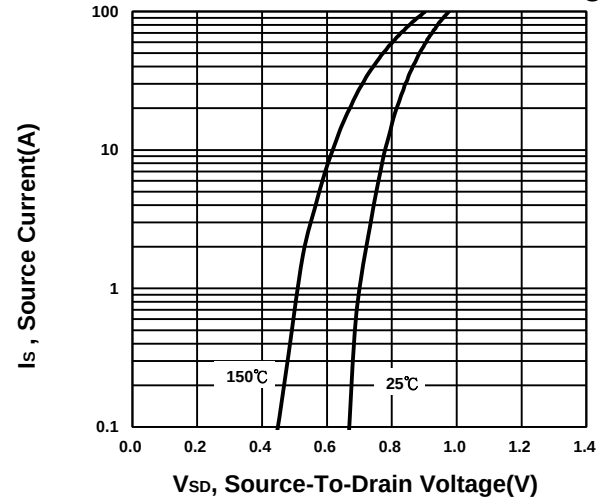


Safe Operating Area

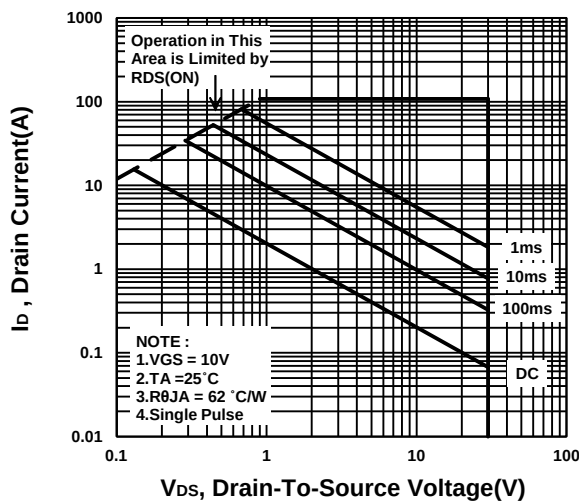


Single Pulse Maximum Power Dissipation

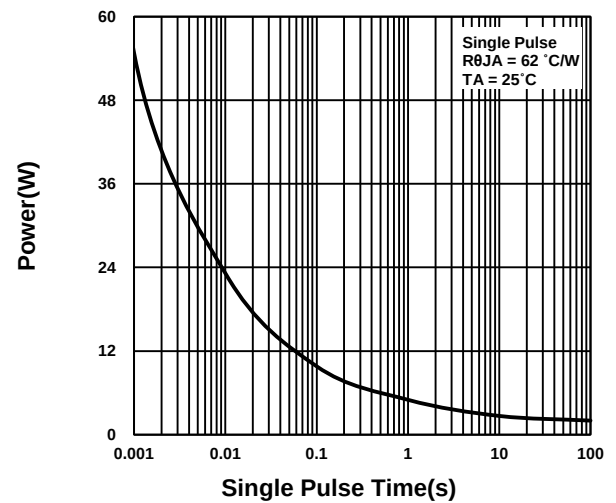


Transient Thermal Response Curve

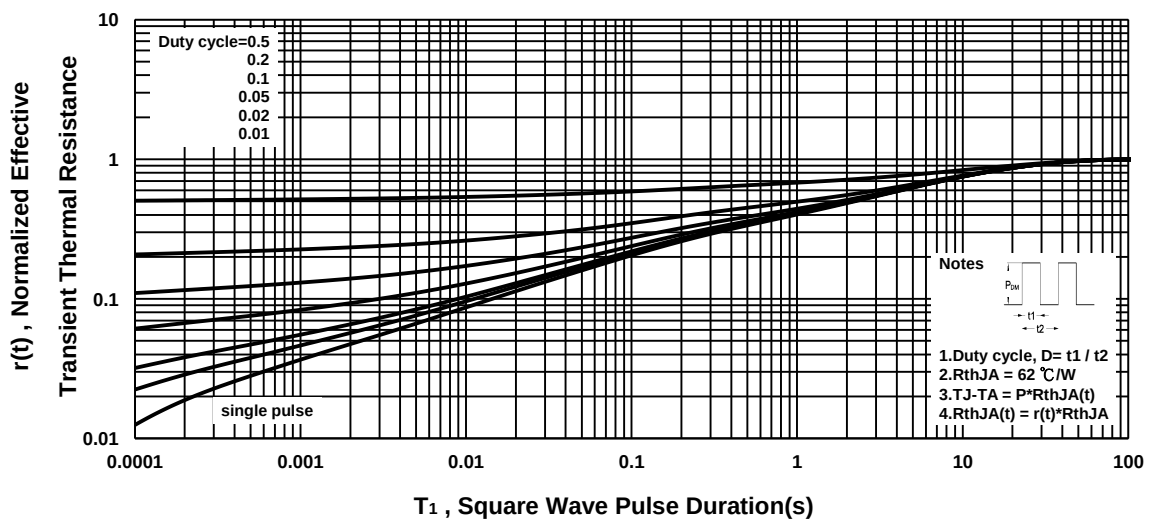

Safe Operating Area

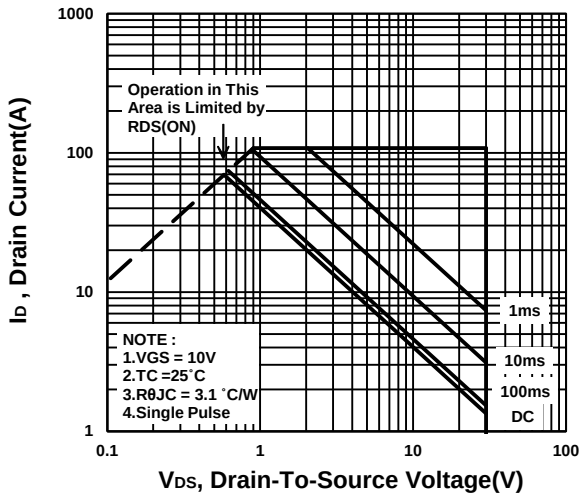

Single Pulse Maximum Power Dissipation

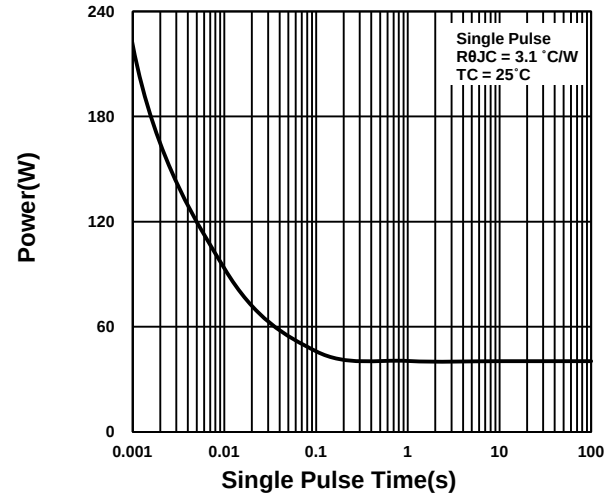

Transient Thermal Response Curve

